

**PROTECTS**

**WHAT IS MOST**

**PRECIOUS**



**CEASEFIRE HOME FIRE  
EXTINGUISHERS RANGE**









# 6 MINUTES. THAT'S ALL THE TIME YOU HAVE BEFORE A FIRE GETS OUT OF CONTROL.

That's the same amount of time you have to detect the fire, rush your family to safety and fight the fire.

Packed with modern utilities for a comfortable lifestyle, homes have become extremely prone to fire. A spark in the electrical panel, a short circuit in the air conditioner or heater, an open flame in the mandir, a carelessly tossed matchstick, an unattended stove, a gas leak; these dangers lurk around the walls of our homes at all times.


The fire services are always on hand to help with a fire emergency, but the reality is that given the way our traffic conditions are today, chances are help won't arrive on time. In most cases, by the time fire tenders reach the scene of fire, they have already lost the six minute window to control fire and prevent damage. Resorting to flooding the area to prevent the fire from spreading, and leaving the home where fire occurred charred and levelled.

**The Loss Prevention Association of India (LPA) puts home fires as the second biggest reason for fatal fire incidents in India. A recent report that combines study of data from hospitals and data published by Indian Police puts fire deaths at approximately 1,63,000 each year. About 2% of all deaths every year in India.**

As per the National Disaster Response Force and Civil Defence, Ministry of Home Affairs, there is a shortage of 97.59% fire stations, 96.28% fireman and 80.04% Fire Tenders and Rescue vehicles. The NDRF&CD reports high rise residential buildings in metropolitan cities constitute a major fire hazard, and a challenge for the fire departments to reach the top for want of necessary equipment.



## Fire grows exponentially

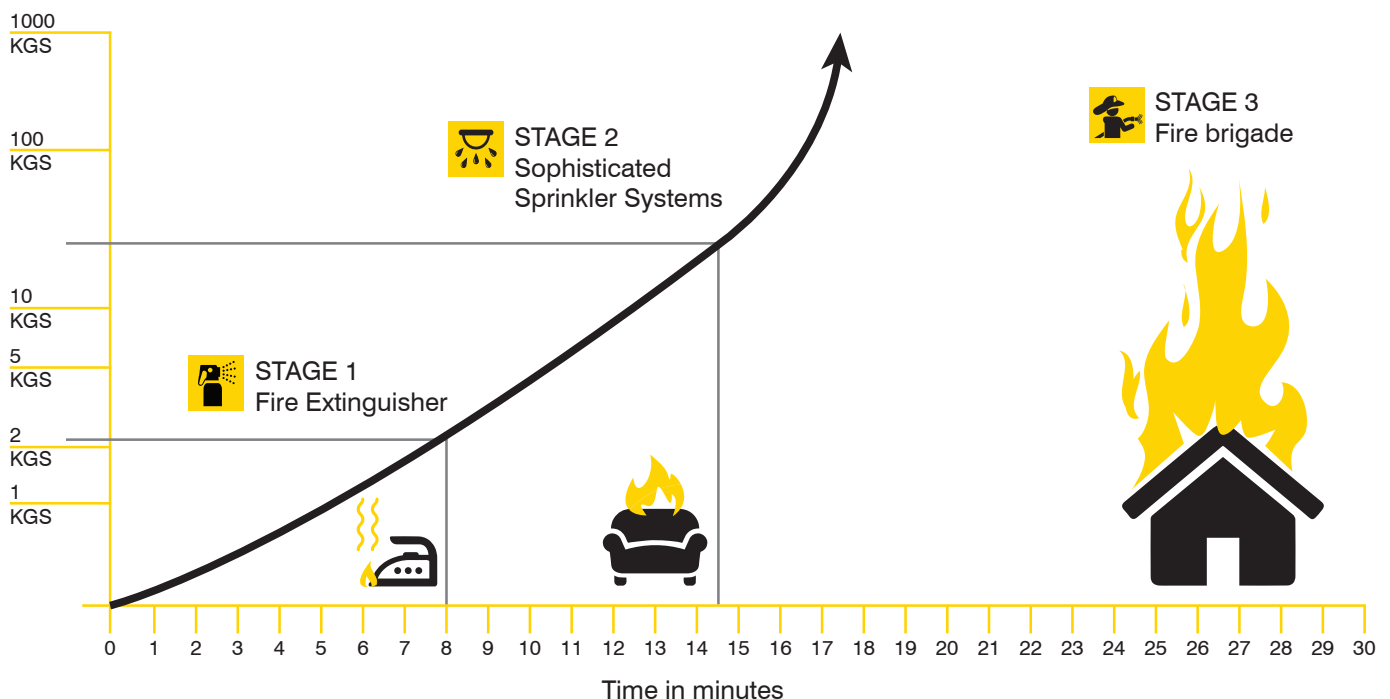



Depending on external help to protect the lives of your loved ones, and save what took you a lifetime to build, is dangerous. That's where **Ceasefire's Home Fire Extinguishers** come in.



#### FIGHTS CLASS

A B C ⚡

#### STANDARDS

EN3 PED

#### CERTIFICATIONS



#### CERTIFYING BODY





The picture of your parents on the side table. The souvenir from your last vacation. The sofa set you spent hours choosing. We know the time you've spent and the effort you've made to make your house a home, which is why we created masterpieces that complement it, while protecting it.

Designed to match the aesthetics of your home, so that it's not tucked out of sight in a fire situation, Ceasefire's Designer range of extinguishers are art installations of fine stainless steel and ink, crafted to meet international standards and designed to exceed them. Making these extinguishers true works of art. Art that save property and lives.





# ENGINEERED TO SAVE LIVES



Unique pressure gauge shows that the extinguisher is ready to use if the needle points to green.

Easy-grip plastic handle

Tamper-proof, easy to pull yellow seal

Precision engineered valve assembly

Rust treated inner cylinder

Epoxy powder coated, outside and inside

Leak-proof, deep drawn steel body

Pilfer-proof bracket



The Ceasefire Designer Extinguisher uses a combination of mono ammonium phosphate (MAP) and ammonium sulphate, packed into a stainless steel extinguisher. The ABC powder ensures a 90% concentration of MAP is available to fight the flames, maximising the extinguisher's firefighting power.

We've also created a clean agent Designer Extinguisher that fights fire without leaving any residue. Powered by an eco-friendly and powerful extinguishing agent, HCFC 123, this firefighter packs in mega power, and is absolutely safe on sensitive electronic equipment. The lightweight extinguisher is has a powerful throw, to penetrate past the finest grills and meshes.



# FEATURES



## **Effective against Class A, B and C as well as Electrical fires:**

No matter the fire, the Designer comes to the rescue. The multiple applications of the extinguishing agent help save valuable time while the agent's effectiveness maximises the firefighting power.



## **Aesthetically Pleasing:**

The modern home is driven by aesthetics. Ceasefire's Designer Extinguishers are created to match the aesthetics of your home, while protecting it.



## **MAP 90:**

90% concentration of Mono Ammonium Phosphate maximises the firefighting power of the extinguisher.



## **Highly Effective:**

Built for speed, power and reliability.



## **Quality Control:**

Stringent quality control and multiple point testing systems ensure that when you are faced with a fire, these extinguishers will deliver.



## **Standards:**

Virtually every Ceasefire extinguisher has LPCB and CE certifications, and conforms to PED standards.



## **Simplicity in Handling:**

The easy-grip plastic handle aids simplicity in handling.



## **World Class Quality:**

Comes with ISO 9001 and CE certification, and conforms to PED standards. Comprehensive Helium Tests



## **Discharge Mechanism:**

A simple discharge mechanism allows you to control the discharge and optimise the use of the extinguishing agent.



and Leak Tests also guarantee that the products you buy are manufactured according to the world's most stringent quality standards.



## **Warranty:**

The 5 years Warranty means Ceasefire is looking out for the health of your fire safety products.





**Sizes Available:** 500 g and 1 kg

**Variants Available:** MAP 50 and MAP 90



# TECHNICAL SPECIFICATIONS

| Nomenclature<br>For Portable<br>Fire<br>Extinguisher | Fire Ext.<br>MAP 90<br>500Gms<br>MS SP<br>Red<br>Texture | Fire Ext.<br>MAP 90<br>500Gms<br>MS SP<br>Ivory<br>Texture | Fire Ext.<br>MAP 90<br>500Gms<br>MS SP<br>Blue<br>Texture | Fire Ext.<br>MAP 90<br>500Gms<br>MS SP<br>Silver<br>Texture | Fire Ext.<br>MAP 90<br>500Gms<br>MS SP<br>Hexalight   | Fire Ext.<br>MAP 90<br>500Gms<br>MS SP<br>Kiterunner  | Fire Ext.<br>MAP 50<br>1Kg<br>MS SP Red<br>(Squeeze<br>Grip) | Fire Ext.<br>MAP 50<br>1Kg<br>MS SP Red<br>(Gun<br>Housing) |
|------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------|
| Stored Pressure<br>/ Cartridge                       | Stored Pressure                                          | Stored Pressure                                            | Stored Pressure                                           | Stored Pressure                                             | Stored Pressure                                       | Stored Pressure                                       | Stored Pressure                                              | Stored Pressure                                             |
| Agent                                                | ABC Powder<br>MAP 90                                     | ABC Powder<br>MAP 90                                       | ABC Powder<br>MAP 90                                      | ABC Powder<br>MAP 90                                        | ABC Powder<br>MAP 90                                  | ABC Powder<br>MAP 90                                  | ABC Powder<br>MAP 50                                         | ABC Powder<br>MAP 50                                        |
| Agent Category                                       | ABC Powder                                               | ABC Powder                                                 | ABC Powder                                                | ABC Powder                                                  | ABC Powder                                            | ABC Powder                                            | ABC Powder                                                   | ABC Powder                                                  |
| Product Code                                         | CF-000224                                                | CF-000223                                                  | CF-000222                                                 | CF-000225                                                   | CF-000946                                             | CF-000947                                             | CF-000803                                                    | CF-000730                                                   |
| Certification<br>Type                                | PED                                                      | PED                                                        | PED                                                       | PED                                                         | PED                                                   | PED                                                   | EN-3, PED                                                    | EN-3, PED                                                   |
| LPCB                                                 | No                                                       | No                                                         | No                                                        | No                                                          | No                                                    | No                                                    | Yes                                                          | Yes                                                         |
| Kitemark                                             | No                                                       | No                                                         | No                                                        | No                                                          | No                                                    | No                                                    | Yes                                                          | Yes                                                         |
| PED                                                  | Yes                                                      | Yes                                                        | Yes                                                       | Yes                                                         | Yes                                                   | Yes                                                   | Yes                                                          | Yes                                                         |
| MED                                                  | No                                                       | No                                                         | No                                                        | No                                                          | No                                                    | No                                                    | Yes                                                          | Yes                                                         |
| Gross Weight                                         | Approx.<br>1.45 kg                                       | Approx.<br>1.45 kg                                         | Approx.<br>1.45 kg                                        | Approx.<br>1.45 kg                                          | Approx.<br>1.45 kg                                    | Approx.<br>1.45 kg                                    | 2.20 to 2.30<br>kg                                           | 2.20 to 2.30<br>kg                                          |
| Net Mass                                             | 0.475 to<br>0.525 kg                                     | 0.475 to<br>0.525 kg                                       | 0.475 to<br>0.525 kg                                      | 0.475 to<br>0.525 kg                                        | 0.475 to<br>0.525 kg                                  | 0.475 to<br>0.525 kg                                  | 0.95 to 1.05<br>kg                                           | 0.95 to 1.05<br>kg                                          |
| Approx. Height<br>Of Fire Ext.                       | 265 mm                                                   | 265 mm                                                     | 265 mm                                                    | 265 mm                                                      | 265 mm                                                | 265 mm                                                | 325 mm                                                       | 325 mm                                                      |
| Discharge<br>Mechanism                               | Thumb<br>Triggered                                       | Thumb<br>Triggered                                         | Thumb<br>Triggered                                        | Thumb<br>Triggered                                          | Thumb<br>Triggered                                    | Thumb<br>Triggered                                    | Squeeze<br>Grip                                              | Thumb<br>Triggered                                          |
| Applicable<br>On Fires                               | A, B, C, &<br>Electrical<br>Started Fire                 | A, B, C, &<br>Electrical<br>Started Fire                   | A, B, C, &<br>Electrical<br>Started Fire                  | A, B, C, &<br>Electrical<br>Started Fire                    | A, B, C, &<br>Electrical<br>Started Fire              | A, B, C, &<br>Electrical<br>Started Fire              | A, B, C, &<br>Electrical<br>Started Fire                     | A, B, C, &<br>Electrical<br>Started Fire                    |
| EN 3 Ratings<br>Class A Fire                         | N/A                                                      | N/A                                                        | N/A                                                       | N/A                                                         | N/A                                                   | N/A                                                   | 5A                                                           | 5A                                                          |
| EN 3 Ratings<br>Class B Fire                         | N/A                                                      | N/A                                                        | N/A                                                       | N/A                                                         | N/A                                                   | N/A                                                   | 34B                                                          | 34B                                                         |
| Can<br>Construction                                  | Deep Drawn<br>And<br>MIG Welded                          | Deep Drawn<br>And<br>MIG Welded                            | Deep Drawn<br>And<br>MIG Welded                           | Deep Drawn<br>And<br>MIG Welded                             | Deep Drawn<br>And<br>MIG Welded                       | Deep Drawn<br>And<br>MIG Welded                       | Deep Drawn<br>And<br>MIG Welded                              | Deep Drawn<br>And<br>MIG Welded                             |
| Valve / Cap<br>Construction                          | Forging<br>And<br>Machining                              | Forging<br>And<br>Machining                                | Forging<br>And<br>Machining                               | Forging<br>And<br>Machining                                 | Forging<br>And<br>Machining                           | Forging<br>And<br>Machining                           | Forging<br>And<br>Machining                                  | Forging<br>And<br>Machining                                 |
| Internal Coating                                     | N/A                                                      | N/A                                                        | N/A                                                       | N/A                                                         | N/A                                                   | N/A                                                   | Epoxy<br>Powder<br>Coating                                   | Epoxy<br>Powder<br>Coating                                  |
| External<br>Coating                                  | Epoxy<br>Polyester<br>Powder                             | Epoxy<br>Polyester<br>Powder                               | Epoxy<br>Polyester<br>Powder                              | Epoxy<br>Polyester<br>Powder                                | Epoxy<br>Polyester<br>Powder<br>Coated &<br>Laminated | Epoxy<br>Polyester<br>Powder<br>Coated &<br>Laminated | Epoxy<br>Polyester<br>Powder                                 | Epoxy<br>Polyester<br>Powder                                |
| Helium Leak<br>Detection<br>Testing                  | Yes                                                      | Yes                                                        | Yes                                                       | Yes                                                         | Yes                                                   | Yes                                                   | Yes                                                          | Yes                                                         |
| Warranty In<br>Years                                 | 5                                                        | 5                                                          | 5                                                         | 5                                                           | 5                                                     | 5                                                     | 5                                                            | 5                                                           |
| G.A. Drawing<br>Number                               | CF/SP.65/<br>GA/04                                       | CF/SP.65/<br>GA/04                                         | CF/SP.65/<br>GA/04                                        | CF/SP.65<br>GA/04                                           | CF/SP.65/<br>GA/04                                    | CF/SP.65/<br>GA/04                                    | CF/SP-1LB-<br>EXP50/GA/05                                    | CF/SP-1LB-<br>50/GA/05                                      |
| Working<br>Pressure                                  | 15Bar                                                    | 15Bar                                                      | 15Bar                                                     | 15Bar                                                       | 15Bar                                                 | 15Bar                                                 | 15Bar                                                        | 15Bar                                                       |
| Dia. Of Shell<br>(OD)                                | 74.5 mm                                                  | 74.5 mm                                                    | 74.5 mm                                                   | 74.5 mm                                                     | 74.5 mm                                               | 74.5 mm                                               | 86.5 mm                                                      | 86.5 mm                                                     |
| Operating<br>Temperature                             | -30° C to<br>+60°C                                       | -30° C to<br>+60°C                                         | -30° C to<br>+60°C                                        | -30° C to<br>+60°C                                          | -30° C to<br>+60°C                                    | -30° C to<br>+60°C                                    | -30° C to<br>+60°C                                           | -30° C to<br>+60°C                                          |
| Hydrostatic Test<br>Pressure                         | 35Bar                                                    | 35Bar                                                      | 35Bar                                                     | 35Bar                                                       | 35Bar                                                 | 35Bar                                                 | 35Bar                                                        | 35Bar                                                       |
| Cylinder<br>Material Spec.                           | Steel<br>CR2(DC01)                                       | Steel<br>CR2(DC01)                                         | Steel<br>CR2(DC01)                                        | Steel<br>CR2(DC01)                                          | Steel<br>CR2(DC01)                                    | Steel<br>CR2(DC01)                                    | Steel<br>CR2(DC01)                                           | Steel<br>CR2(DC01)                                          |
| Body Thickness                                       | 1.2 mm                                                   | 1.2 mm                                                     | 1.2 mm                                                    | 1.2 mm                                                      | 1.2 mm                                                | 1.2 mm                                                | 1.6 mm                                                       | 1.6 mm                                                      |

\* Please check the product specifications at the time of placing your order from our website (address of which is given at the end of this catalogue). Specifications can change without notice due to our continuous R&D and product improvisation initiatives.



| Nomenclature For Portable Fire Extinguisher | Fire Ext. MAP 90 1Kg MS SP Red (Gun Housing) | Fire Ext. MAP 90 1Kg Red Texture   | Fire Ext. MAP 90 1Kg Ivory Texture | Fire Ext. MAP 90 1Kg Blue Texture  | Fire Ext. MAP 90 1Kg Silver Texture | Fire Ext. MAP 90 1Kg MS SP Waves          | Fire Ext. MAP 90 1Kg MS SP Elasticity     |
|---------------------------------------------|----------------------------------------------|------------------------------------|------------------------------------|------------------------------------|-------------------------------------|-------------------------------------------|-------------------------------------------|
| Stored Pressure / Cartridge                 | Stored Pressure                              | Stored Pressure                    | Stored Pressure                    | Stored Pressure                    | Stored Pressure                     | Stored Pressure                           | Stored Pressure                           |
| Agent                                       | ABC Powder MAP 90                            | ABC Powder MAP 90                  | ABC Powder MAP 90                  | ABC Powder MAP 90                  | ABC Powder MAP 90                   | ABC Powder MAP 90                         | ABC Powder MAP 90                         |
| Agent Category                              | ABC Powder                                   | ABC Powder                         | ABC Powder                         | ABC Powder                         | ABC Powder                          | ABC Powder                                | ABC Powder                                |
| Product Code                                | CF-000721                                    | CF-001185                          | CF-001105                          | CF-001106                          | CF-001107                           | CF-000951                                 | CF-000954                                 |
| Certification Type                          | EN-3, PED                                    | PED                                | PED                                | PED                                | PED                                 | PED                                       | PED                                       |
| LPCB                                        | Yes                                          | No                                 | No                                 | No                                 | No                                  | No                                        | No                                        |
| Kitemark                                    | Yes                                          | No                                 | No                                 | No                                 | No                                  | No                                        | No                                        |
| PED                                         | Yes                                          | Yes                                | Yes                                | Yes                                | Yes                                 | Yes                                       | Yes                                       |
| MED                                         | Yes                                          | No                                 | No                                 | No                                 | No                                  | No                                        | No                                        |
| Gross Weight                                | 2.20 to 2.30 kg                              | 2.20 to 2.30 kg                    | 2.20 to 2.30 kg                    | 2.20 to 2.30 kg                    | 2.20 to 2.30 kg                     | 2.20 to 2.30 kg                           | 2.20 to 2.30 kg                           |
| Net Mass                                    | 0.95 to 1.05 kg                              | 0.95 to 1.05 kg                    | 0.95 to 1.05 kg                    | 0.95 to 1.05 kg                    | 0.95 to 1.05 kg                     | 0.95 to 1.05 kg                           | 0.95 to 1.05 kg                           |
| Approx. Height Of Fire Ext.                 | 325 mm                                       | 325 mm                             | 325 mm                             | 325 mm                             | 325 mm                              | 325 mm                                    | 325 mm                                    |
| Discharge Mechanism                         | Thumb Triggered                              | Thumb Triggered                    | Thumb Triggered                    | Thumb Triggered                    | Thumb Triggered                     | Thumb Triggered                           | Thumb Triggered                           |
| Applicable On Fires                         | A, B, C, & Electrical Started Fire           | A, B, C, & Electrical Started Fire | A, B, C, & Electrical Started Fire | A, B, C, & Electrical Started Fire | A, B, C, & Electrical Started Fire  | A, B, C, & Electrical Started Fire        | A, B, C, & Electrical Started Fire        |
| EN 3 Ratings Class A Fire                   | 5A                                           | 5A                                 | 5A                                 | 5A                                 | 5A                                  | 5A                                        | 5A                                        |
| EN 3 Ratings Class B Fire                   | 21B                                          | 21B                                | 21B                                | 21B                                | 21B                                 | 21B                                       | 21B                                       |
| Can Construction                            | Deep Drawn And MIG Welded                    | Deep Drawn And MIG Welded          | Deep Drawn And MIG Welded          | Deep Drawn And MIG Welded          | Deep Drawn And MIG Welded           | Deep Drawn And MIG Welded                 | Deep Drawn And MIG Welded                 |
| Valve / Cap Construction                    | Forging And Machining                        | Forging And Machining              | Forging And Machining              | Forging And Machining              | Forging And Machining               | Forging And Machining                     | Forging And Machining                     |
| Internal Coating                            | Epoxy Powder Coating                         | N/A                                | N/A                                | N/A                                | N/A                                 | N/A                                       | N/A                                       |
| External Coating                            | Epoxy Polyester Powder                       | Epoxy Polyester Powder             | Epoxy Polyester Powder             | Epoxy Polyester Powder             | Epoxy Polyester Powder              | Epoxy Polyester Powder Coated & Laminated | Epoxy Polyester Powder Coated & Laminated |
| Helium Leak Detection Testing               | Yes                                          | Yes                                | Yes                                | Yes                                | Yes                                 | Yes                                       | Yes                                       |
| Warranty In Years                           | 5                                            | 5                                  | 5                                  | 5                                  | 5                                   | 5                                         | 5                                         |
| G.A. Drawing Number                         | CF/SP-1LB-90/GA/05                           | CF/SP-1/GA/05                      | CF/SP-1/GA/05                      | CF/SP-1/GA/05                      | CF/SP-1/GA/05                       | CF/SP-1LB-50/GA/05                        | CF/SP-1LB-50/GA/05                        |
| Working Pressure                            | 15Bar                                        | 15Bar                              | 15Bar                              | 15Bar                              | 15Bar                               | 15Bar                                     | 15Bar                                     |
| Dia. Of Shell (OD)                          | 86.5 mm                                      | 86.5 mm                            | 86.5 mm                            | 86.5 mm                            | 86.5 mm                             | 86.5 mm                                   | 86.5 mm                                   |
| Operating Temperature                       | -30° C to +60° C                             | -30° C to +60° C                   | -30° C to +60° C                   | -30° C to +60° C                   | -30° C to +60° C                    | -30° C to +60° C                          | -30° C to +60° C                          |
| Hydrostatic Test Pressure                   | 35Bar                                        | 35Bar                              | 35Bar                              | 35Bar                              | 35Bar                               | 35Bar                                     | 35Bar                                     |
| Cylinder Material Spec.                     | Steel CR2(DC01)                              | Steel CR2(DC01)                    | Steel CR2(DC01)                    | Steel CR2(DC01)                    | Steel CR2(DC01)                     | Steel CR2(DC01)                           | Steel CR2(DC01)                           |
| Body Thickness                              | 1.6 mm                                       | 1.6 mm                             | 1.6 mm                             | 1.6 mm                             | 1.6 mm                              | 1.6 mm                                    | 1.6 mm                                    |

\* Please check the product specifications at the time of placing your order from our website (address of which is given at the end of this catalogue). Specifications can change without notice due to our continuous R&D and product improvisation initiatives.

## DESIGNER SERIES THE CLASSIC RANGE



---

The Classic Designer Series extinguishers  
are available in a choice of four colours:

Blue, Ivory, Silver and Red  
to match your interiors.

---



DESIGNER SERIES  
THE ART RANGE



Ceasefire Elasticity



Ceasefire Waves



Ceasefire Hexalight



Ceasefire Kiterunner

# CEASEFIRE DESIGN CELL :


No two premises are alike. By offering the most flexible system configurations in the industry, Ceasefire provides the most efficient protection for facilities. Believing that the most effective fire solutions are the ones that are customised according to the unique characteristics of the area being protected, Ceasefire has established the Ceasefire Design Cell (CDC).

Functioning as the single touch point for all fire safety needs, CDC is manned by fire experts and managers with years of experience in fire safety under their belts. As a part of Ceasefire's 360 degree protection solution, the Ceasefire Technical Survey team visits your facility and conducts a detailed study to understand its vulnerabilities and requirements. They survey the premises and work out requirement based on fire threats in the room.

Once it has been finalised, Ceasefire's expert Installation Team oversee installation and testing. The Ceasefire Team also trains you and your staff to use the fire safety system.

## Benefits:

- An exhaustive planning process, executed by engineers with years of experience.
- State-of-the-art solutions and products in association with world leaders.
- Design and installation of your System overseen by professionals, ensuring delivery of a high quality & reliable system.

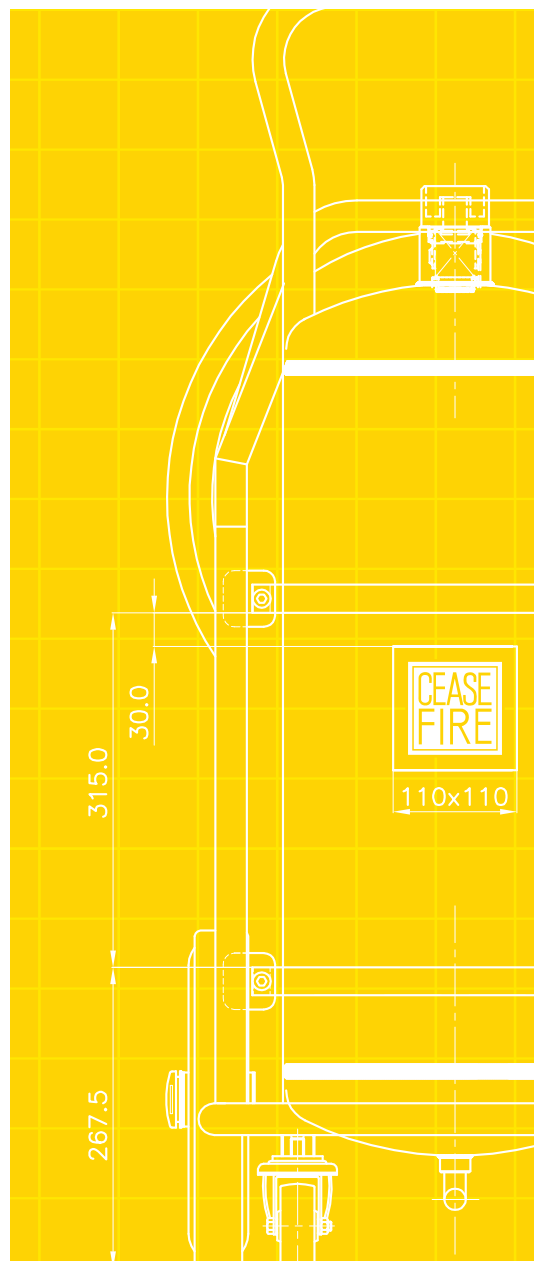

## CEASEFIRE NOW

360° lifesaving fire safety solutions. More than 3,000 new customers a month. A product sold every 61 seconds. A life saved every 5 minutes. Presence in over 300 cities and towns. Backed by a team of more than 2,000. 400 lifesaving products – from green fire extinguishers that can tackle any kind of fire to first of its kind automatic fire extinguisher to more advanced independent suppression systems – Ceasefire has it all. We're equipped and ready to protect your premises.





## Ceasefire Industries UK Limited

3, Waterhouse Square, 138-142 Holborn, London, EC1N2SW, United Kingdom

Tel: 0-113-868-6666 / 0-126-891-9999

---

[www.ceasefire.co.uk](http://www.ceasefire.co.uk)

Follow us on:



MARKETED BY: